



Stone band saw

CBAS-500



for quick and precise use on the construction site

- suitable for dry cutting of large building blocks of cellular concrete and hollow bricks with low density
- automatic saw band switch-off after end of cut
- inclined cutting table, practical handles, large wheels and swivelling transport eyelet for easy relocation
- mitre angle stop with quick-release lever
- operating hours counter

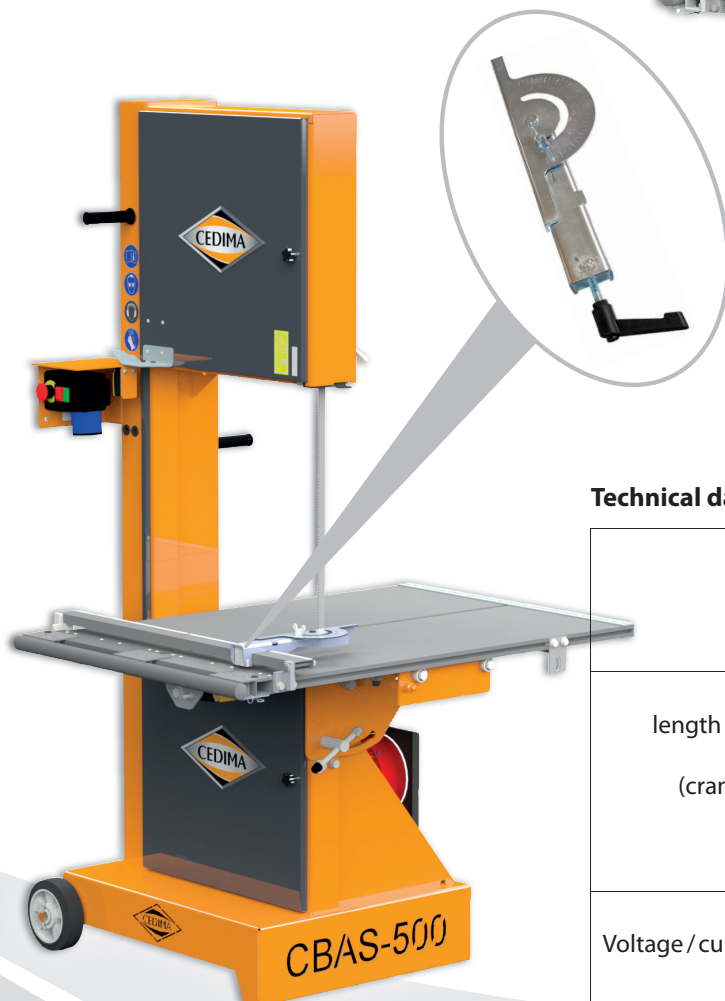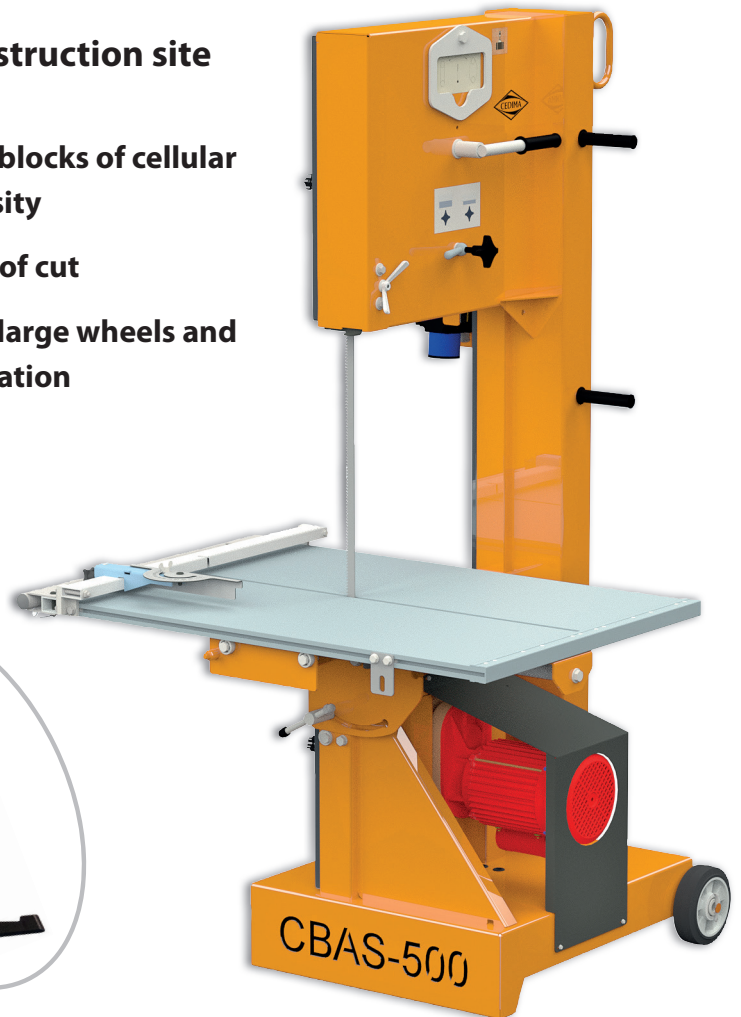

Technical data and equipment features

| | |
|---------------------------------|---------------------------------|
| Table width | 710 mm |
| Passage height | 510 mm |
| Passage width | 490 mm |
| Cutting length | 690 mm |
| Dimensions | |
| length x width x height | |
| Transport (crane eye swivelled) | approx. 860 mm/1095 mm/1970 mm |
| ready for use | approx. 1100 mm/1095 mm/1845 mm |
| Weight | approx. 150 kg (without tool) |
| Drive | |
| Voltage / current / frequency | 230 V / 12.5 A / 50 Hz |
| Output power | 1.5 kW |