


## Joint cutter



# CF-400 easycut

The compact joint cutter for cutting work in asphalt, concrete and similar abrasive building materials, especially in confined or difficult to access areas.

- Extremely easy to transport due to compact design and low weight
- Stepless cutting depth adjustment via swivelling lever with depth indicator
- Ergonomically designed, height-adjustable and low vibration mounted push handle

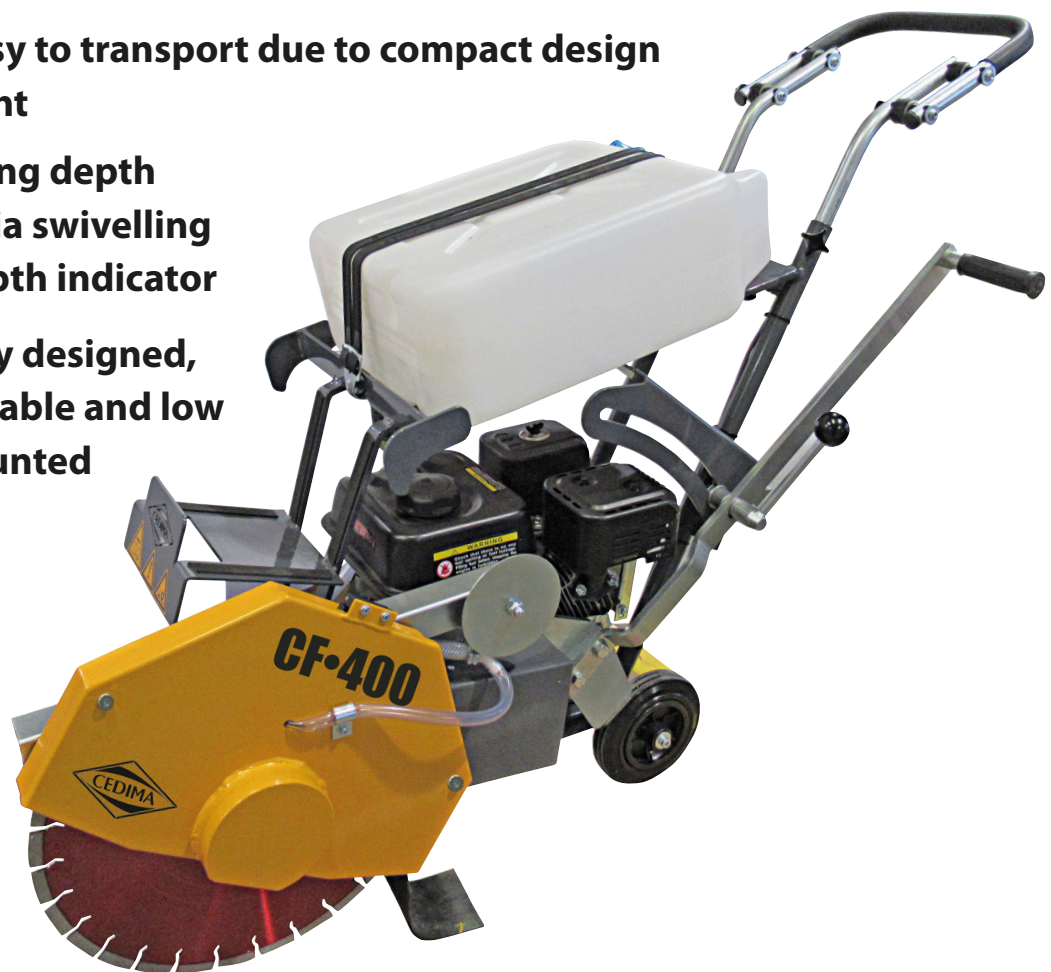

- Water supply via water tank or pressurised water
- For extra long cutting periods it is possible to mount a second water tank – up to 44 l cooling water can be used



# CEDIMA® Joint cutter CF-400 easycut



## Technical data and equipment features

<b>Drive motor*</b>	
Manufacturer	Loncin
Type	G200F LC
Mode	air-cooled, 1-cylinder, 4 stroke, petrol
Power output*	4.1 kW / 3600 rpm
Cubic capacity*	196 cm <sup>3</sup>
Engine ignition device	Reversing starter with pull rope
Fuel tank capacity	3.61 l
Fuel consumption at continuous output	approx. 1.7 l/h
Feed	Manually via adjustable, vibration-damped push handle
Diamond saw-blade receptacle	left
Diamond saw-blade support tap Ø	25.4 mm (with central hexagon clamping nuts SW 24)
Max. diamond saw-blade clamping width	10 mm
Driving pin Ø	8 mm
Cutting shaft speed	2240 rpm
Diamond saw-blade Ø	350 mm – 400 mm
Max. cutting depth	up to 140 mm
<b>Dimensions and weight</b>	
length x width x height	Transport: approx. 1030 mm/ 520 mm/ 990 mm Ready to work: approx. 1730 mm/ 520 mm/ 1140 mm
Total weight	approx. 62 kg (without diamond saw blade and water) approx. 87 kg (with diamond saw blade and water)
Water tank, water filling quantity	removable, up to 22 litres
optional second water tank	22 litres

\* motor operating manual is decisive

