

NEW



FASTRAC | 8000 SERIES

Rated power: 280-335hp (209-250kW) Maximum operating weight: 35,200lbs (16,000kg)





Discover the difference

Just one look tells you the Fastrac 8000 is different. Discover how greater speed, comfort, productivity, safety and versatility can make the difference to you and your business.

The new Fastrac 8000 is the largest and most powerful JCB tractor yet. It is faster, more comfortable, more versatile and has more safety features than any other tractor in its class, letting you get even more done in a day.





SPEED WITH SAFETY.

THE FASTEST PRODUCTION TRACTOR IN THE WORLD WITH A TOP SPEED OF 43MPH (70KPH) AND MORE SAFETY FEATURES THAN ANY OTHER TRACTOR. THAT'S THE BIG FASTRAC DIFFERENCE.

Lighter, responsive steering.

1 New and exclusive hydrostatic dual steering system significantly reduces operator effort while meeting the exceptional safety standards for high speed tractors (>37mph/60kph).

2 On the road, the new steering is precise and well weighted, which makes driving the largest Fastrac even more of a pleasure – especially with all the essential safeguards on a tractor built for speed.

3 Add the Rapid Steer option to reduce lock to lock turns of the steering wheel by 50% and make headland and other field maneuvers quicker and easier.

4 The GPS ready capability allows for hands free steering which maximizes efficiency by minimizing overlaps and accuracy at up to 25mph (40kph) for spraying, spreading and mowing applications.



Stops consistently quicker than any conventional tractor.

4 Another unique Fastrac feature – external brakes on both axles and powerful twin calipers with air-over hydraulic operation to meet DOT standards to stop consistently up to 15% quicker than conventional tractors.

5 Advanced anti-lock system (ABS) retains stability and steering while optimizing braking performance – on paved roads, dirt roads and in the field. A trailer ABS connection is standard too.

7 The Fastrac's fail-safe braking system ensures the brakes are applied in the event of a loss of pressure. A transmission disc park brake holds the tractor securely and applies air brakes on a trailer, tanker or spreader too.

Optional road performance package incorporates traction control and hill hold feature, unique to JCB.



4



5



6



7

ULTIMATE COMFORT.

THE ONLY TRACTOR WITH ALL-AROUND SUSPENSION. IT'S JUST ONE MORE UNIQUE FEATURE THAT MAKES THIS TRACTOR DIFFERENT FROM THE REST.



Driving is believing.

1 If you've never experienced the Fastrac from behind the wheel you can't appreciate just how much smoother the ride comfort is in the field and on the road.

2 Mid-mounted cab location, all-around suspension and high-spec air seat ensure a ride that's second to none.


3 Active rear suspension quickly responds to the added weight from a rear 3-point or deck mounted implement. This maintains good ground clearance, stability and ride comfort. The option of up to 3520lbs (1600kg) of additional rear deck weight also helps improve traction for heavy workloads.

4 At the front, robust coil spring and damper suspension for the front axle contributes to the Fastrac's incomparable ride.



5 We all know that front axle suspension improves traction by eliminating power hop – well it's also true for rear axle suspension. That's one reason for the exceptional tractive effort generated by the Fastrac's tires.

6 With a top speed of 43mph (70kph), this is one fast tractor! Yet the vehicle dynamics mean sure-footed stability in corners and on straights, whether carrying mounted implements to the next job or towing a trailer, spreader or tanker.

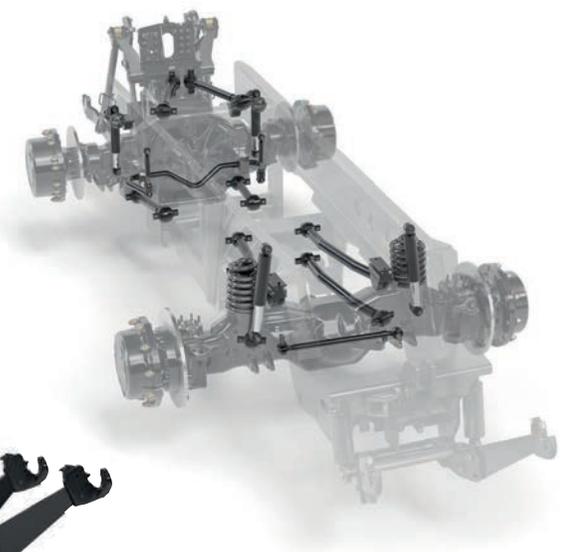

WORKING CLASS.

THE NEW COMMAND PLUS CAB IS THE LARGEST ON THE MARKET WITH BEST-IN-CLASS COMFORT, VISIBILITY AND ERGONOMICS. AS SOON AS YOU STEP IN YOU'LL SEE THE DIFFERENCE.

New instrument panel positioned directly ahead of the driver presents all essential vehicle information and warnings on a bright, high-definition display that needs only a glance to keep an eye on speeds.



Fully adjustable steering wheel and column, and ideally located pedals, provide the perfect driving position.

1 Space, comfort, practicality – three words that sum up the Fastrac's new Command Plus cab. All-around visibility is great, all controls are placed in easy reach, and there's a full-size instructor's seat, so everyone rides safely in comfort.

2 Leather trim provides ultimate luxury for a comfortable and supportive driver's seat that can rotate fully 50 degrees right and 20 degrees left.

3 Attaching the slim instrument casing to the steering column means it remains visible however the wheel can be adjusted for reach and angle without impeding forward visibility.

4 Forward-raked 'A' pillars make the doorways bigger and increase interior spaciousness, while the near-vertical windshield reduces heat absorption on a sunny day.



There is audio input compatibility with the sound system, or specify a Bluetooth radio.

Everything in reach.

6 Deep door glass and rear three quarter opening windows ensure good forward, side and over-the-shoulder visibility. The 220 degree wiper provides maximum visibility in all weather conditions.



6 Seat-mounted console houses the most frequently used control switches and dials with a generously padded armrest built in.



7 Switches used less often are arranged logically on the right-hand cab pillar – out of the way but within easy reach when needed.

8 Optional electric cooler stores food and drinks. A folding molded seat back forms a handy flat surface that's ideal for lunch breaks and making notes for field records.

9 Climate control air conditioning keeps the temperature comfortable and quickly de-mists the windows on early mornings. Opening rear three-quarter windows add natural ventilation and a fixed roof window option floods the cab with light.



10 Extra lights in the hood and optional LED work lights illuminate the area around the tractor as if it were daytime!

11 External LED work light remains on for 3 minutes to give you time to exit the cab safely and proceed on your journey home.



GREATER PRODUCTIVITY.

WITH FASTER ROAD AND IN-FIELD SPEEDS PLUS UNIQUE ALL-AROUND SUSPENSION, THE NEW FASTRAC 8000 SERIES WILL QUICKLY MAKE A BIG DIFFERENCE.

It's a brilliant field work tractor...

1 With near 50:50 static weight distribution, tires up to 900/50 R42 and the traction advantages of suspension on both axles, the Fastrac 8290 and 8330 are ideally equipped for heavy field work.

2 Ingenious Activ Traction manages engine torque to keep the Fastrac's wheels from spinning to ensure maximum productivity even in tricky conditions.

3 Powerful hydraulics with plenty of flow meet the demands of implements such as planters through six, double-acting electric spool valves and 'power beyond'. Up to 37gpm (140 liters/min) per valve slice using an oil supply separate from the transmission to prevent contamination.



Activ Traction





5

...and brilliant with trailed equipment too!

4 Properly equipped for its 43mph (70kph) top speed with all-around suspension and DOT standard air braking, the Fastrac moves from job to job quicker and more securely than any other tractor of its size and power.

5 No holding back – a rough field surface is no deterrent to Fastrac operators with all-around suspension and a high-spec air seat smoothing the way, so baling, spreading and mowing operations can be completed quicker and with less operator fatigue.



4

BEST-IN-CLASS VERSATILITY.

A PURPOSE-DESIGNED CHASSIS MAKES THE DIFFERENCE WHEN IT COMES TO GREATER IMPLEMENT MOUNTING VERSATILITY. SO WHEREVER YOU ARE IN THE WORLD, WHATEVER YOUR APPLICATION, THE FASTRAC DELIVERS.

Handles with care.

1 The Fastrac's powerful Category III rear hitch lifts a genuine 22,000lbs (10,000kg) to handle big 22,000lbs (10,000kg), cultivators and mounted drills. Sensitive electronic draft control helps maintain traction under heavy load.



2 For added productivity, use the optional Category II integrated front hitch with 7700lbs (3500kg) capacity, handy external lift/lower control and fold-away arms to operate front mounted implements.



3 For top traction, use the 5500lbs (2500kg) capacity load deck to carry 1980lbs (900kg) or 3520lbs (1600kg) ballast weights to exploit the tractor's 35,200lbs (16,000kg) maximum gross vehicle weight.



4 Purpose-designed chassis gives more implement-mounting versatility than any other tractor in its class.

5 New heavy-duty axles can be used at 120in (3m) track width for controlled traffic and row crop applications.





ALL THE POWER YOU NEED.

THE BEST POWERTRAIN AND SUSPENSION SYSTEM COMBINE TO DELIVER THE ULTIMATE IN POWER, TORQUE AND TRACTION TO REALLY MAKE THE DIFFERENCE IN ANY SITUATION.

Power on demand.


1 Choose the performance level that suits your land, cropping and equipment – with outputs up to 335hp (250kW) and 1440Nm (1062lbf), there's no shortage of power or torque.

2 Performance-proven 8.4-liter, six-cylinder engine delivers economical power with new twin turbocharger installation bringing sharp responses and high torque ratings across a wide range of engine speeds.

Highly efficient SCR and DOC emissions control technology meets US Tier 4 Final emissions standards without added service demands.

3 Emissions control equipment is installed without impeding superb all-around visibility from the new CommandPlus cab.

Enhanced control software ensures the engine and CVT transmission work as an integrated driveline even more effectively and efficiently.

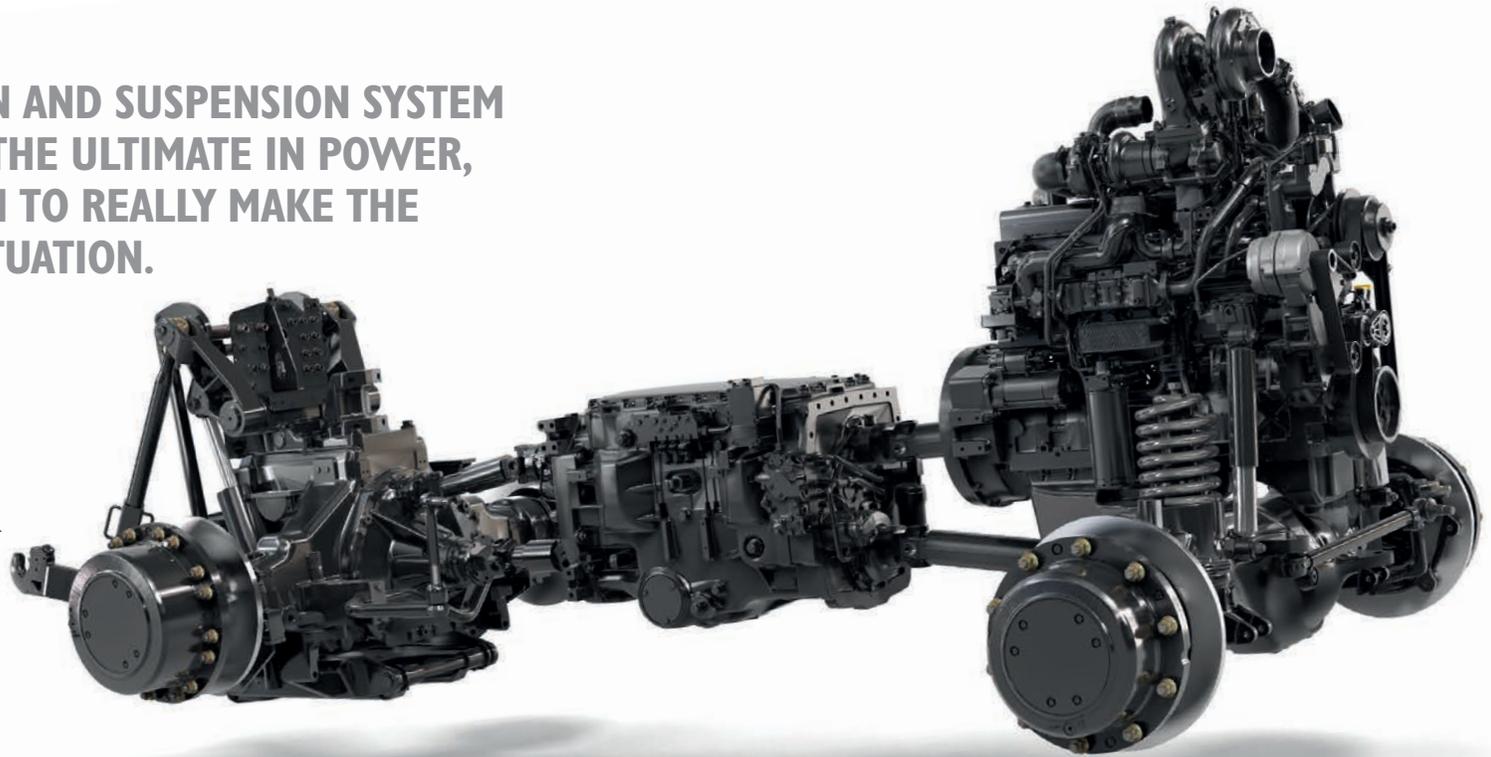

Efficient power delivery.

4 CVT transmission with improved cruise control functions ensures optimum use of power and torque, with seamless acceleration and power delivery, ideal ground speed for every operation, and ultra-fine speed control for top-quality work with all implements.

5 Unique Powershift mode has 15 speeds for field work, 10 for road use – an ideal option for less experienced operators.

6 Highly efficient two speed rear PTO (540E/1000rpm) and the optional front PTO (1000rpm) provide mechanical drive for both front and rear implements.

7 Drive on the accelerator pedal or use the joystick controller; engage cruise control or change speed on the fly – whichever best suits the situation and the driver's preference.



TOTAL CONTROL.

LIKE ALL COLOR TOUCH SCREEN TERMINALS, THE FASTRAC IS DESIGNED TO PUT ALL ESSENTIAL COMMAND AND CONTROL FUNCTIONS AT THE OPERATOR'S FINGERTIPS. BUT WITH OURS, THE DIFFERENCE IS CLEAR.


A touch easier.

Large icons on the Fastrac touch screen terminal are easier to finger-tap on the move; intuitive navigation gets quickly to the functions the operator wants to set or adjust.

With just a few simple taps of the screen, select the main tractor functions, set up PTO, diff-lock and 4wd cut-outs or adjust timing and flow of the electronic spool valves to suit different implements.

Create and save up to 5 sequences each with up to 15 steps in the Headland Turn Assist section to minimize control workload at the end of each run across a field.

Select different work-light combinations, allocate multiple functions to the joystick buttons and customize the display to individual tastes.

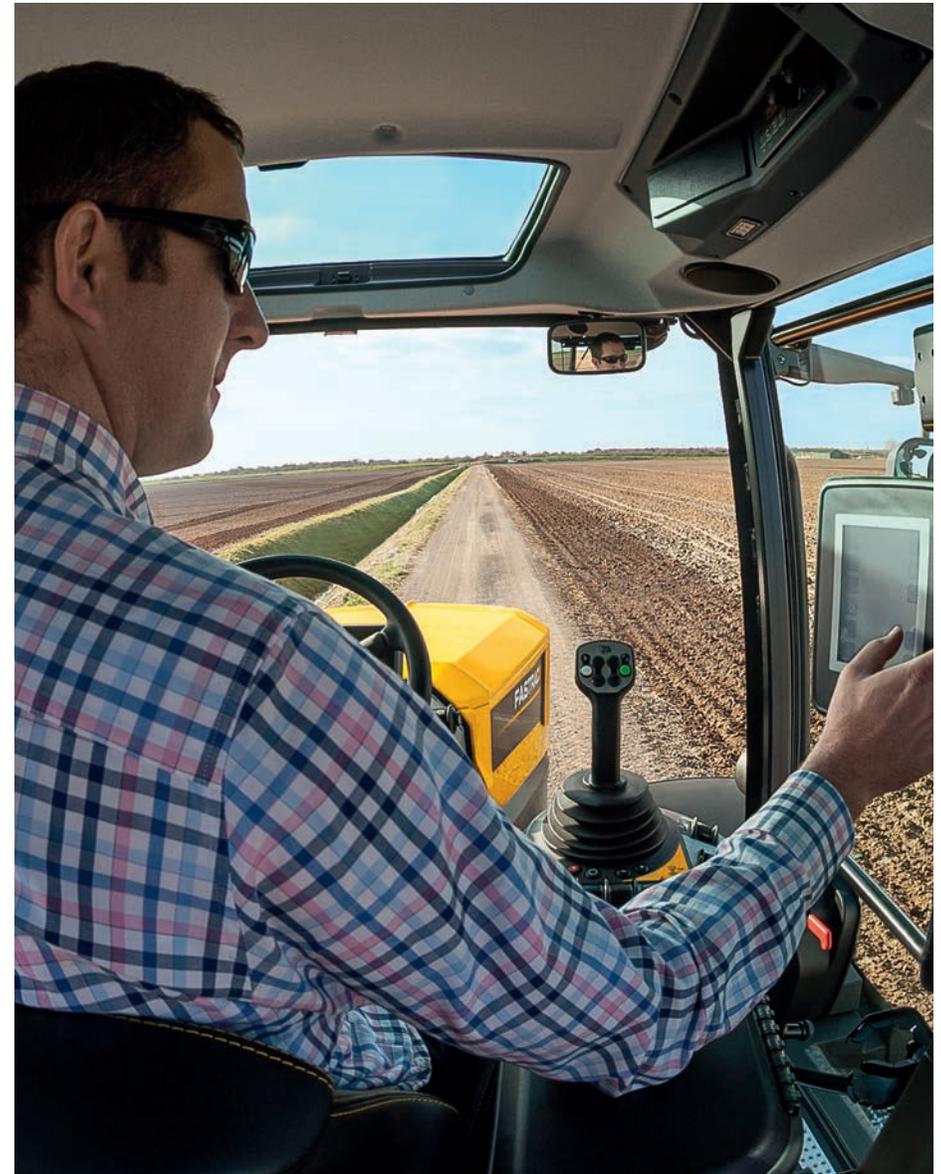

EASY SERVICING AND MAINTENANCE.

WHEN IT COMES TO ROUTINE SERVICE AND MAINTENANCE YOU'LL EVEN NOTICE THE DIFFERENCE HERE. QUICK AND EASY ACCESS MEANS REDUCED DOWNTIME FOR THE NEW FASTRAC 8000 SERIES.

Designed with care.

- 1 Quick and easy access encourages regular service attention for a long and reliable work life – so the high-lift hood and fold-out cooling system make it easy to give your Fastrac the attention it deserves.
- 2 Dip the oil without lifting the hood, top up fuel, DEF and oil for the hydraulics with ease as the fillers are all on the same side.
- 3 Reaching the batteries, battery isolator and brake fluid reservoirs could not be easier – just open a panel behind the right-hand cab steps.
- 4 External disc brake assemblies provide exceptional service access reducing service and maintenance downtime.



DESIGNED TO PASS ANY TEST.

HOT WEATHER, COLD WEATHER, RAIN, SNOW, FOG, DUST AND MUD. THE NEW FASTRAC 8000 SERIES HAS BEEN TESTED TO WORK IN EVERY CONDITION. SO WHEREVER AND WHENEVER YOU WORK, YOU WON'T NOTICE A DIFFERENCE IN PERFORMANCE.

Tried, tested, trusted.

1 From the fields of North America to the snowy landscapes of Scandinavia; and from the chill of the Arctic to the searing heat of Africa we test our Fastrac tractors to the extreme.

2 Every nut and bolt, every molding and fabrication, every sub-assembly and major component must work to the standard expected of every JCB machine.

3 Durability is designed-in and built-in; we change, improve and refine in response to customer feedback and to meet the high standards we set for ourselves – and those of our customers.

4 To ensure optimum operation in the coldest climates the DEF system is fully prepared for harsh winter temperatures, heated supply lines and in tank heating ensures optimum performance in the coldest of climates.



A PROUD HERITAGE.

WE'VE BEEN MAKING THE DIFFERENCE FOR OVER 25 YEARS. AND EVERYTHING WE'VE LEARNED ABOUT BUILDING THE WORLD'S MOST VERSATILE AND PRODUCTIVE TRACTORS IS DISTILLED INTO THE NEW FASTRAC 8000 SERIES.

Experience makes the difference.

We've been building Fastrac tractors since 1991; they have been continually evolving.

Today's versions are very different but they still possess a unique combination of features that deliver unrivaled speed, safety, comfort, productivity and versatility.

With three ranges covering 160hp to 335hp (119kW to 250kW) there has never been a better choice of Fastrac – it's all the tractor you will ever need.



Original prototype 1991



185 Fastrac – 1994



3155/3185 Fastrac – 1998



3190/3220 – 2002

LIVELINK, WORK SMARTER.


JCB LIVELINK IS AN INNOVATIVE SOFTWARE SYSTEM THAT LETS YOU MONITOR AND MANAGE YOUR MACHINES REMOTELY – ONLINE, BY EMAIL OR BY MOBILE PHONE.

LIVELINK GIVES YOU ACCESS TO A WHOLE HOST OF USEFUL DATA, INCLUDING MACHINE ALERTS, FUEL REPORTS AND EVENT HISTORY INFORMATION.

ALL YOUR MACHINE INFORMATION IS HANDLED AT A SECURE DATA CENTER FOR YOUR PEACE OF MIND.

Productivity and cost benefits

For ultimate productivity and cost-saving, JCB LiveLink provides information like idle time monitoring and machine fuel consumption to help reduce your fuel usage. Machine location information can improve fleet efficiency and you may even enjoy reduced insurance costs courtesy of the added security that LiveLink brings.

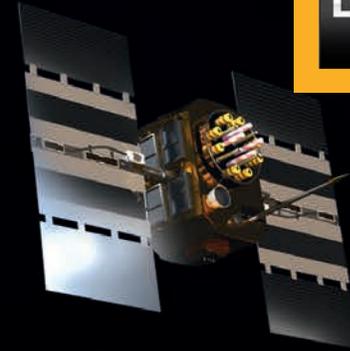

Maintenance benefits

JCB LiveLink makes it easy to manage machine maintenance. Accurate hours monitoring and service alerts improve maintenance planning, and real-time location data helps you manage your fleet. You'll also have access to critical machine alerts and maintenance history records.



Security benefits

Keep your machine operating safely with JCB LiveLink. Real-time geofencing alerts tell you when machines move out of predetermined operating zones, and real-time curfew alerts inform you if machines are being used when they're not supposed to be. Real time location information helps you store your machines in the safest places.



Note: Please consult your local dealer for Livelink availability.

HERE TO MAKE THE DIFFERENCE.

JCB'S WORLDWIDE CUSTOMER SUPPORT IS FIRST CLASS. WHATEVER YOU NEED AND WHEREVER YOU ARE, WE'LL BE AVAILABLE QUICKLY AND EFFICIENTLY TO HELP MAKE SURE YOUR MACHINERY IS PERFORMING TO ITS FULL POTENTIAL.



1

1 Our Technical Support Service provides instant access to factory expertise, day or night, while our Finance and Insurance teams are always on hand to provide fast, flexible, competitive quotes.

2 The global network of JCB Parts Centers is another model of efficiency; with 16 regional bases, we can deliver around 95% of all parts anywhere in the world within 24 hours. Our genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity.




2


3 JCB offers comprehensive extended warranties, as well as service-only or repair and maintenance contracts. Irrespective of what you opt for, our maintenance teams around the world charge competitive labor rates, and offer non-obligation quotations as well as fast, efficient insurance repair work.



3

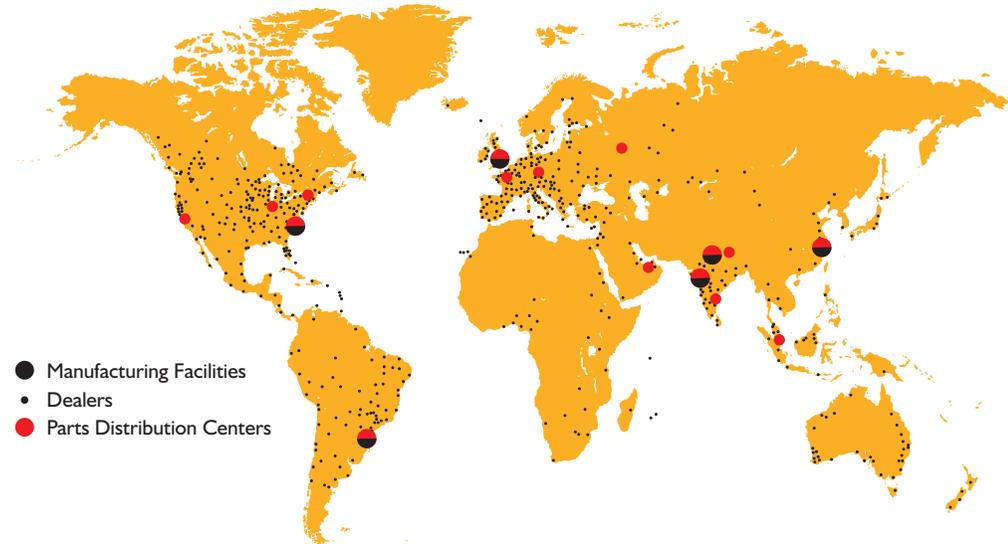

STATIC DIMENSIONS

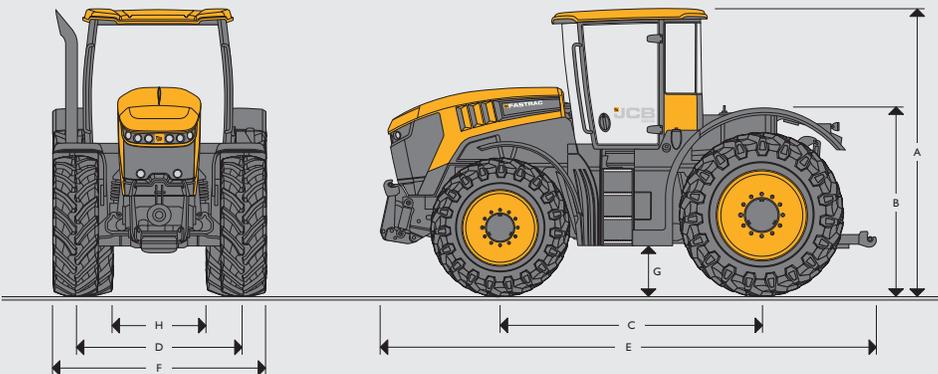

Tires		540/65 R34 + 710/70 R38	
A	Height over cab	ft-in (mm)	11-1 (3380)
B	Height over deck	ft-in (mm)	4-11 (1510)
C	Wheelbase	ft-in (mm)	10-3 (3120)
D	Track width	ft-in (mm)	6-8 (2030)
E	Overall length	ft-in (mm)	18-6 (5650)
F	Overall width	ft-in (mm)	8-4 (2550)
G	Ground clearance	ft-in (mm)	1-7 (470)
H	Width between tyres	ft-in (mm)	3-7 (1100)

ENGINE

		8290	8330
Rated power 97/68 EC	hp (kW)	280 (209)	335 (250)
Max. power 97/68 EC	hp (kW)	306 (228)	348 (260)
Max. torque @ 1500rpm	Nm (lbf)	1310 (996)	1440 (1062)
Make	AGCO Power		
Model	84AWF		
Injection	Bosch CP4 common rail		
No. of cylinders	6		
Capacity	cc (cu in)	8419 (514)	
Bore	mm (in)	111 (4.37)	
Stroke	mm (in)	145 (5.7)	
Cooling	Water		
Air cleaner	Powercore dry element		
Aspiration	Turbocharged and intercooled		

SUSPENSION

Front: Coil spring and damper.

Rear: Hydro-pneumatic self leveling.

ELECTRICAL SYSTEM

System voltage	Volt	12
Alternator output	Amp	200
Battery capacity	Amp hour	2 x 110 (2 x 950 cca)

CAPACITIES

Fuel tank	gal (liters)	159 (600)
Hydraulic tank	gal (liters)	40 (150)
Urea tank	gal (liters)	16 (60)

HYDRAULICS

Rear 3 point linkage control	Electronic raise/lower with depth, draft/position intermix, rate of drop and maximum lift height control plus external lift and lower.
Rear 3 point linkage type	Category III; Quick attach hook ends, eye end top link.
Rear 3 point linkage capacity	22,000lbs (10,000kg)
Front 3 point linkage (optional) control	Electronic raise/lower with depth, rate of drop and maximum lift height control plus external lift and lower
Front 3 point linkage (optional) type	Category II; Quick attach hook ends, folding arm.
Front 3 point linkage (optional) capacity	7700lbs (3500kg)

AUXILIARY HYDRAULICS

		Standard	Optional
Max. oil flow @ rated speed	gpm (l/min)	36 (137)	47 (178)
Flow per slice	gpm (l/min)	26.5 (100)	37 (140)
Operating pressure	psi (bar)	3045 (210)	3045 (210)
Spool valves	Electronic 7 position double acting with flow and time control, float position and zero leak		
Standard (Agricultural version)	3 spool valves to the rear		
Optional (Agricultural version)	4 spool valves to the rear, load sensing hydraulic connection, 1 or 2 front supplies, front free flow return		
Couplers	Quick release/spill-off piped to reservoir (front and rear)		

POWER TAKE OFF

Rear PTO type	Fully independent to front and rear (front optional)		
Actuation	Electro-hydraulic		
Rear PTO speeds	540rpm @ 1570 engine rpm, 1000rpm @ 1930 engine rpm		
Rear PTO output spline	21 spline 1" 3/8 diameter + 20 spline 1" 3/4		
Rear PTO type (optional)	6 spline 1 3/8" diameter (optional)		
Front PTO speed	1000rpm @ 2030 engine rpm (optional)		
Front PTO output spline	6 spline 1 3/8" diameter (optional)		
		8290	8330
PTO power	hp (kW)	272 (203)	310 (231)

AXLES	
Type	Beam with outboard epicyclic reduction hubs.
Wheel mountings	10 stud front axle, 16 stud rear axle.
Four wheel drive engagement	Four wheel drive engagement Electrohydraulic.
Differentials	Differential lock: front and rear electro-hydraulics soft engage.

STEERING	
Type	Standard: Hydrostatic dual steering system, fixed ratio. Optional: Hydrostatic dual steering system, GPS ready with Rapid Steer.
Column	Tilt and telescope adjustable

BRAKES	
Type	Outboard discs with twin calipers and ABS on all four wheels.
Operation	Air over hydraulic to EEC truck specification.
Park brakes	Independent disc on transmission output
Actuation	Sprung on, air pressure off
Trailer brakes	Twin line air brakes, single line hydraulic brakes automatically applied by tractor park break, ABS 12v trailer supply socket as standard

TRANSMISSION	
Type	2 range continuously variable transmission with 6 modes of operation.
Speeds (low)	0-25mph (0-40kph)
Speeds (high)	0-43mph (0-70kph)

VEHICLE WEIGHTS					
		Front axle	Rear axle	Total	
Base machine less front linkage & FPTO	lbs (kg)	12,712 (5766)	11,735 (5323)	24,450 (11090)	
+540/65 R38 front + 710/70 R38 rear, front linkage & FPTO	lbs (kg)	13,911 (6310)	12,092 (5485)	26,005 (11796)	
Maximum permissible vehicle weight	lbs (kg)	35,200 (16,000)			

WHEELS AND TYRES		
	Size	Track width standard in (mm)
Agricultural pattern	540/65R38 + 650/75/R38	78 (1990) + 72 (1834)
Agricultural pattern	540/65R38 + 710/70/R38	78 (1990) + 72 (1834)
Agricultural pattern	540/65R38 + 710/70R38	78 (1990) + 72 (1834)
Utility pattern	440/80R34 + 650/65R38	78 (1990) + 72 (1834)
Agricultural pattern (Territory dependent)	650/65R34 + 900/50 R42	78 (1990) + 72 (1834)

Front directional and rear fixed fenders. All tires are speed rated for 40mph (65kph) or 43mph (70kph).

CAB	Standard equipment includes:
	Fully automatic climate control, Air suspension seat with armrest mounted transmission and auxiliary controls, Color touch screen display, providing transmission information and setup capability, Electronic spool valves, Category 2 filtration, Front and rear wash wiper, Front sunblind, Full road lighting equipment, Auxiliary electrical and speed sensor sockets, Full size passenger seat, Lap belt for driver and passenger, Slim line backlit dashboard, Storage compartment, Radio preparation with single DIN slot and four speakers. Cable access through rear window, Rear fender mounted raise/lower and PTO switches.

OPTIONAL EQUIPMENT	Depending on model and territory:
	1870lbs (850kg) front weight, 1980lbs (900kg)/3520lbs (1600kg) rear deck weight, 6 spline 1 1/4 PTO shaft, Headland Turn Assist with radar and performance monitor, Deluxe seating options, Heated front and rear screens, Electric heated mirrors with additional wide angle lens, Auxiliary audio input, Halogen and LED worklights options, External rear fender control buttons, 7 pin front power socket, 3 pin front power socket, Interior rear view mirror, Automatic rear linkage stabilizers, Hookend/hydraulic top link, Electric cooler, Rear hitch camera, Roof window, Rear window blind.



ONE COMPANY, OVER 300 MACHINES.

FASTRAC 8000 SERIES

Rated power: 280-335hp (209-250kW) Maximum operating weight: 35,200lbs (16,000kg)

Your nearest JCB Dealer

JCB North American - Headquarters

Savannah, 2000 Bamford Blvd., Savannah, Georgia, 31322 Tel: (912) 447-2000

Download the very latest information on this product range at agriculture.jcbna.com

JCB inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB inc. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

