


Chucks

Quick action chuck for turntables

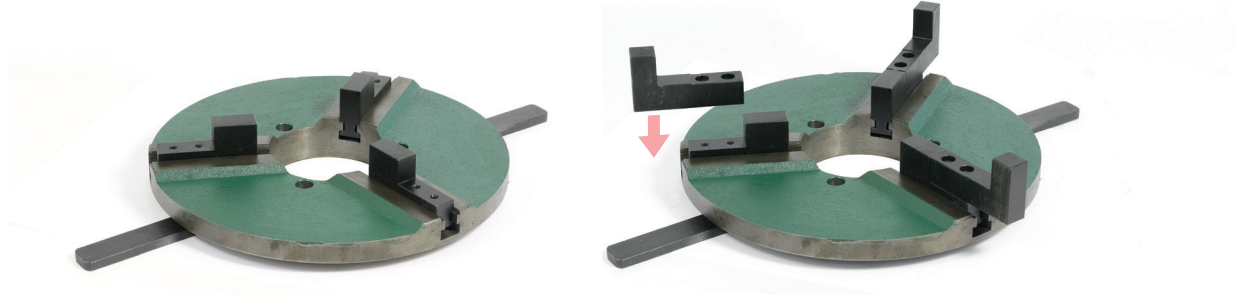


Features

- Extra flat design made of cast iron with hollow shaft.
- Low weight.
- Changes center of gravity minimally.

Left: Chuck 300
Right: Chuck 300 JW with a set of additional clamp jaws.

Model	*Chuck 200 JW	Chuck 300 JW	Chuck 400 JW	Chuck 500 JW	Chuck 600 JW
Hollow shaft	80 mm	100 mm	170 mm	240 mm	365 mm
Diameter	200 mm	300 mm	400 mm	500 mm	600 mm
Diameter + lever	400 mm	480	580 mm	-	840 mm
Inner tensioning range	20 - 130mm	80 - 190mm	120 - 250mm	360 - 500 mm	450 - 600 mm
Inner tensioning range	110 - 210mm	170 - 280 mm	250 - 380mm	200 - 340 mm	300 - 450 mm
Extended tens. range	5 - 300mm	10 - 400mm	20 - 500mm	-	-
Mounting hole circle	100 mm	120 mm	220 mm	280 mm	400 mm
Tension force	200 kg	250 kg	350 kg	800 kg	1200 kg
Max. load	80 kg	120 kg	240 kg	600 kg	1000 kg
Weight	7,5	12 kg	25 kg	42 kg	80 kg
Fixture	3-M8 x 35	3-M8 x 30	3-M10 x 40	3-M12 x 55	3-M12 x 110
Item no.	02.20.10.01020 (old: 91919110)	02.20.10.01030 (old: 91919111)	02.20.10.01040 (old: 91919116)	02.20.10.01050 (old: 91919202)	02.20.10.01060 (old: 91919206)

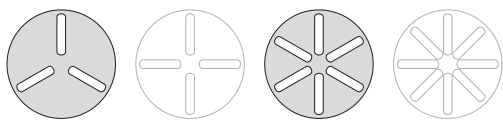

The jaw chuck of this series fit without modifications to the JAVAC rotary tables with three and six grooves.

Mounting plate for chucks



Chuck	PRO2	PRO3	PRO4	POS300	POS500	POS750
*Chuck 200 JW	x	x	x	x	x	x
Chuck 200-D			x			x
Chuck 300 JW	x	x	x	x	x	x

* for the Chuck 200JW you need for all Pro and Pos turntables the mounting plate with the item number: 9191912125 (please note for Pro4 the hollow shaft can only be used up to 80 mm)

External diameter 300 mm
Drill 80 mm
Item no.: 91919125