



FLEXMARKER-KIT FMK

The FLEXMARKER-KIT FMK is a complete system to shape and mark tailor-made curves. Creating dynamically shaped paths without visual interruptions.


- ▶ Harmonious curves can be prepared quickly and with enormous time savings.
- ▶ The kit contains 10 fiberglass rods with 1 meter length and 10 binders for pins 5 fixing claws.
- ▶ Smallest bending radius 15 cm

Work mode 1: The connectable fiberglass rods can be securely fixed on the existing pavement with the fixing claws. The curve can be marked by spray paint or chalk (e.g. PAVER-MARKER PM of Probst). Weighted by paving stones, the claws are immovably fixed.

Work mode 2: For paths and bed edges, the so-called one-liner, are laid in dry concrete. For that purpose the FLEXMARKER-KIT FMK can be fixed at the pins with the binders. It doesn't only show the curve, it also shows the vertical profile.



Type	Specifications	Dead Weight kg (lbs)	Order-Number
FMK	Consists of: 10 fiberglass rods, 5 fixing claws and 10 binders	2,7 (6)	5180.0074

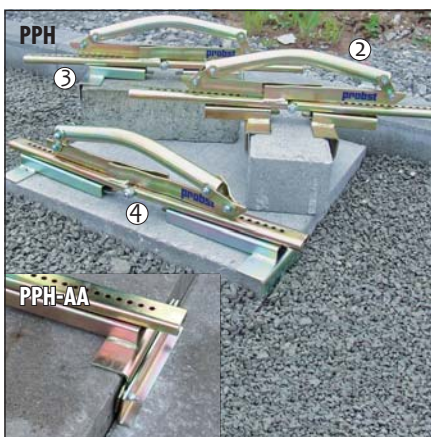

Profi-Slab Handle PPH

For laying concrete and natural stone slabs. Large adjustable range for all slabs.

- ▶ With large leverage
- ▶ Very stable professional design
- ▶ Galvanized finish
- ▶ Exchangeable grippers
- ▶ PPH-S comes as a set with a basic unit and 3 sets of grippers

▶ Support adapter for retrofit at any time PPH-AA allows for quick and more accurate fit in. (1 unit required per PPH)

▶ 2-man carrying handle PPH-2-HG for all PPH models. With one wing nut, the handle can be turned through 90° as required.



Type ^①	Gripping Range* W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
PPH-10/37 ②	100 – 370 (4 – 14½")	60 (130)	1.5 (3.2)	5320.0053
PPH-22/50 ③	220 – 505 (7½ – 19½")	60 (130)	1.5 (3.2)	5320.0052
PPH-33/62 ④	330 – 620 (13 – 24")	60 (130)	1.5 (3.2)	5320.0054
PPH-S-10/62	100 – 620 (4 – 24")	60 (130)	3 (7)	5320.0055
PPH-AA			0,1 (0.2)	4320.0079
PPH-2-HG			2,3 (5)	4320.0085

① Durable surface protection by galvanizing